

DECLARATION

I, Fabien GUERRE of BREVALEX – 3, Rue du Docteur Lancereaux-75008-PARIS, do hereby declare that I am conversant with the English and French languages and that the following is a true and correct translation into English of the French Patent Application n° 02 11093 (*Composition de maquillage des fibres kératiniques présentant un extrait sec en solides élevé combiné à un profil adhésif particulier*) as filed in France on September 6, 2002.

Signed this *November 21, 2007*

F.GUERRE

A handwritten signature in black ink, appearing to be 'F. GUERRE', written over the printed name.

**KERATIN FIBRE MAKEUP COMPOSITION COMBINING
HIGH SOLIDS CONTENT WITH SPECIFIC
ADHESION PROFILE**

5

DESCRIPTION

TECHNICAL FIELD

The present invention relates to a makeup composition for keratin fibres, particularly the eyelashes and eyebrows, which has a high solids content in combination with a specific adhesion profile, with the aim of enhancing the volumizing effect of the said composition.

15 **PRIOR ART**

Makeup compositions for keratin fibres, and especially the eyelashes, may take various forms, for example the form of two-phase oil-in-water (O/W) or water-in-oil (W/O) emulsions or of multiphase emulsions comprising more than two phases, for example W/O/W, or aqueous or anhydrous dispersions. These compositions are characterized by a solids content, which results in part from a dispersed fatty phase comprising one or more waxes in order to bring the substance onto the keratin fibres and hence to give a makeup result which is more or less volumizing.

It is known from the prior art that, the higher the solids content of a composition, the greater the deposition of substance on the keratin fibres, and especially the eyelashes, and, consequently, the more volumizing the result. Nevertheless, increasing the solids content, in other words most often the amount of waxes, in a composition (emulsion or dispersion) entails an increase in the consistency of the resulting product and hence makes application to the fibres

complicated and difficult, since the composition is thick and viscous and is deposited with difficulty and in a heterogeneous manner, in lumps.

Increasing the solids content is therefore
5 limited by the increase in consistency, and generally does not exceed 45% of the total weight of the composition. This limitation on the solids content is often associated with the impossibility of increasing the proportion of waxes in the fatty phase, which does
10 not exceed 25% for reasons of feasibility; and, between 20% and 25% of wax the compositions are often very thick, compact and difficult to apply and exhibit unsatisfactory cosmetic properties.

Another means for enhancing the dry solids
15 extract is to incorporate solid particles such as fillers or pigments, but the increase in consistency also limits the maximum percentage of solids; furthermore, the use of solid particles in high quantity is not beneficial to homogeneous and smooth
20 deposition, owing not only to the consistency but also to the size of the particles introduced, which gives the deposition a rough, granular appearance.

Another means of enhancing the volumizing effect is to increase the adhesiveness of the
25 composition on the fibres in order to promote the attachment when the composition is applied to the keratin fibres. For this purpose use is made of what are called tackifying additives, but these additives cannot be incorporated in a high proportion for
30 feasibility reasons (they make the composition compact) and cosmetic reasons (they are too sticky to apply), which further limit the increase in the solids content and hence the volumizing effect.

This is generally the case with mascaras
35 referred to as volumizing or thickening or loading,

which are difficult to apply and give a heterogeneous makeup result.

It is therefore not possible with the means known at the present time to obtain an eye makeup
5 composition which combines a high solids content and a satisfactory adhesive power, for reasons of feasibility and of cosmetic qualities.

There is therefore a need for a keratin fibre makeup composition which has a good loading effect
10 while exhibiting excellent properties of application to the keratin fibres, in particular the eyelashes and which permits a rapid makeup of keratin fibres.

DESCRIPTION OF THE INVENTION

15 The aim of the invention is to provide a composition comprising a high solids content in combination with an optimal adhesive power so as to enhance the volumizing effect while retaining ease of application.

20 The invention accordingly provides keratin fibre makeup compositions having

- a solids content defined by a dry solids extract of more than 45% of the total weight of the composition; and
- 25 - an adhesion profile ≤ 2.5 , the said adhesion profile representing the ratio of the adhesive power at T_0 (written PA_{T_0} , T_0 corresponding to the time at which the composition is applied) to the adhesive power when 20% of the said composition has evaporated
30 ($PA_{20\%}$).

Such a composition advantageously comprises a solids content greater than 46%, preferably greater than 47%, more preferably greater than 48% or better still greater than 50% of the total weight of the
35 composition. In particular this solids content is

advantageously less than or equal to 85%, preferably less than or equal to 75%, and better still less than 65% of the total weight of the composition.

5 The higher the dry solids extract, the greater the thickening effect.

Advantageously such a composition has an adhesion profile of from 0.05 to 2.5, preferably from 0.1 to 2.2, more preferably from 0.2 to 2, better still from 0.3 to 1.8, more preferentially from 0.5 to 1.8
10 and still more preferentially from 1 to 1.8.

Such a composition having the aforementioned features may advantageously be obtained by a composition comprising at least one fatty phase comprising at least one specific structuring agent of
15 the said fatty phase. This fatty phase presents advantageously defined properties of tack and of hardness.

Such structuring agents have the advantage of being incorporable in very large amounts which can
20 range up to 50% by weight of the composition without substantially increasing the consistency.

It is therefore possible to incorporate these structuring agents into part or all of the fatty phase without greatly increasing the consistency and
25 therefore to achieve overall solids contents which are much higher than in the prior art, with an optimum adhesive power.

Indeed, by virtue of these structuring agents, it is possible easily to modulate the adhesive
30 power, since the said power must be high at the time of application, for effective attachment to the keratin fibres, but must no longer make the deposit too sticky in the course of drying, so as to retain ease of application.

35 The advantage therefore lies in the fact that

it is possible to obtain a high overall solids content in the final composition ($> 45\%$) in combination with a controlled adhesive power, which allows the eyelashes to be made up rapidly and with volume.

5 Another advantage is that the use of this type of agents also makes it possible to obtain compositions of conventional consistency which are easy to apply and form a homogeneous deposit on the keratin fibres.

10 Such a structuring agent may be selected from tackifying waxes, the combinations of a specific compound and at least one oil, and mixtures thereof.

 When one or more of the structuring agents is a tackifying wax, the wax advantageously exhibits the
15 following features:

 - a tack ≥ 0.7 N.s, in particular ranging from 0.7 to 30 N.s.; preferably ≥ 1 N.s, in particular ranging from 1 to 20 N.s, or better still ≥ 2 N.s., in particular ranging from 2 to 10 N.s; and preferentially
20 from 2 to 5 N.s;

 - a hardness ≤ 3.5 MPa, preferably ranging from 0.01 to 3.5 MPa, more preferably still from 0.05 to 3 MPa, and even better still from 0.1 to 2.5 MPa.


 In accordance with the invention, in the text
25 above and below, a wax is any lipophilic, fatty compound which is solid at ambient temperature (25°C) and atmospheric pressure (760 mmHg, or 10^5 Pa) featuring a reversible solid/liquid change of state, having a melting point of more than 30°C and better
30 still more than 55°C which can be up to 200°C , in particular up to 120°C .

 By taking the wax to its melting point it is possible to make it miscible with oils and to form a microscopically homogeneous mixture, but by taking the
35 temperature of the mixture to ambient temperature the

wax recrystallizes in the oils of the mixture.

The melting point values correspond, in accordance with the invention, to the melting peak measured with the aid of a differential scanning calorimeter (DSC), for example the calorimeter sold under the name DSC 30 by Mettler, with a temperature rise of 5 or 10°C per minute.

As tackifying wax it is possible to use a C₂₀-C₄₀ alkyl (hydroxystearyloxy)stearate (the alkyl group containing 20 to 40 carbon atoms), in particular a C₂₀-C₄₀ alkyl 12-(12'-hydroxystearyloxy)stearate, of formula (I):

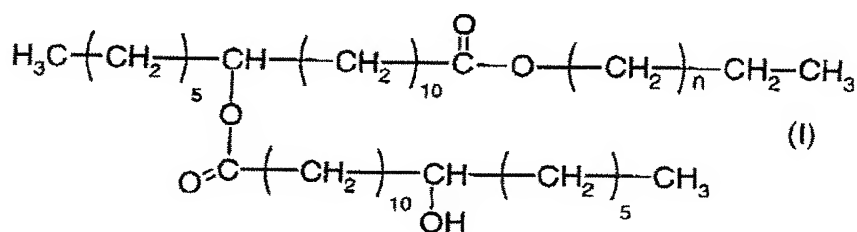

in which n is an integer ranging from 18 to 38, or a mixture of compounds of formula (I).

Such a wax is sold in particular under the names Kester Wax K 82 P and Kester Wax K 80 P by Koster Keunen.

The structuring agent or agents may be selected from the combinations of a specific compound with at least one oil. The specific compound may be selected from semi-crystalline polymers; fatty-phase rheological agents such as polyamide-type polymers and hydrophobic silicas; and mixtures thereof.

This structuring agent, according to the invention, consisting of the combination of a specific compound and at least one oil, advantageously has the following features:

- a tack ≥ 0.1 N.s, in particular from 0.1

to 30 N.s, preferably ≥ 0.5 N.s, in particular from 0.5 N.s to 20 N.s, better still ≥ 0.8 N.s, in particular from 0.8 to 10 N.s, and even better ≥ 1 , in particular between 1 and 5 N.s;

- 5 - a hardness ≤ 30 MPa, in particular from 0.01 to 30 MPa, preferably from 0.05 to 25 MPa, better still from 0.1 to 20 MPa.

In accordance with the invention, in the case of the abovementioned combinations, an oil is a fatty
10 substance which is liquid at ambient temperature.

The oil may be selected from all physiologically acceptable oils and in particular cosmetically acceptable oils, especially mineral oils, animal oils, vegetable oils, synthetic oils; in
15 particular volatile or non-volatile hydrocarbon oils and/or silicone oils and/or fluoro oils and mixtures thereof.

Generally the oil exhibits a viscosity of from 0.5 to 100 000 cps, preferably from 50 to
20 50 000 cps and more preferably from 100 to 300 000 cps.

More specifically, a hydrocarbon oil is an oil comprising principally atoms of carbon and hydrogen and optionally one or more functions selected from hydroxyl, ester, ether and carboxyl functions.

25 Possible examples of oils which can be used in the invention include

- hydrocarbon oils of animal origin such as perhydrosqualene;

- vegetable hydrocarbon oils such as
30 liquid triglycerides of fatty acids of 4 to 24 carbon atoms, such as the triglycerides of heptanoic or octanoic acid or else sunflower oil, maize oil, soya oil, marrow oil, grapeseed oil, sesame oil, hazelnut oil, apricot oil, macadamia oil, castor oil or avocado
35 oil, triglycerides of caprylic/capric acids such as

those sold by Stearineries Dubois or those sold under the names Miglyol 810, 812 and 818 by Dynamit Nobel, jojoba oil and karite butter;

5 - linear or branched hydrocarbons of mineral or synthetic origin, such as liquid paraffins and their derivatives, vaseline, polydecenes, polybutenes, and hydrogenated polyisobutene such as Parleam;

10 - synthetic esters and ethers in particular of fatty acids, such as the oils of formula R_1COOR_2 in which R_1 represents the residue of a higher fatty acid containing 1 to 40 carbon atoms and R_2 represents a hydrocarbon chain containing 1 to 40 carbon atoms, with $R_1 + R_2 \geq 10$, such as, for
15 example, Purcellin oil, isononyl isononanoate, isopropyl myristate, 2-ethylhexyl palmitate, 2-octyldodecyl stearate, 2-octyldodecyl erucate, isostearyl isostearate and tridecyl trimellitate; hydroxylated esters such as isostearyl lactate, octyl
20 hydroxystearate, octyldodecyl hydroxystearate, diisostearyl malate, triisocetyl citrate, and heptanoates, octanoates and decanoates of fatty alcohols; polyol esters such as propylene glycol dioctanoate, neopentylglycol diheptanoate, and
25 diethylene glycol diisononanoate; and pentaerythritol esters such as pentaerythrityl tetraaisostearate;

 - fatty alcohols having 12 to 26 carbon atoms, such as octyldodecanol, 2-butyloctanol, 2-hexyldecanol, 2-undecylpentadecanol and oleyl
30 alcohol;

 - fluoro oils, optionally with a partial hydrocarbon and/or silicone content;

 - silicone oils such as linear or cyclic, volatile or nonvolatile polydimethylsiloxanes (PDMS);
35 polydimethylsiloxanes containing alkyl, alkoxy or

phenyl groups, pendant or at the silicone chain end, groups having 2 to 24 carbon atoms; phenylated silicones such as phenyltrimethicones, phenyldimethicones, phenyltrimethylsiloxydiphenylsiloxanes, 5 diphenyldimethicones, diphenylmethyldiphenyltrisiloxanes and 2-phenylethyl trimethylsiloxysilicates,

- and mixtures thereof.

The oil preferably has a molecular mass of 10 greater than or equal to 250 g/mol, in particular between 250 and 10 000 g/mol, preferably greater than or equal to 300 g/mol, in particular between 300 and 8 000 g/mol, and better still greater than or equal to 400 g/mol, in particular between 400 and 5 000 g/mol.

15 This oil may be selected from:

- polybutylenes such as Indopol H-100 (of molar mass or MM = 965 g/mol), Indopol H-300 (MM = 1 340 g/mol) and Indopol H-1500 (MM = 2 160 g/mol), which are sold or manufactured by Amoco;

20 - hydrogenated polyisobutylenes such as Panalane H-300 E, sold or manufactured by Amoco (M = 1 340 g/mol), Viseal 20 000, sold or manufactured by Synteal (MM = 6 000 g/mol) and Rewopal PIB 1 000, sold or manufactured by Witco (MM = 1 000 g/mol);

25 - polydecenes and hydrogenated polydecenes such as Puresyn 10 (MM = 723 g/mol) and Puresyn 150 (MM = 9 200 g/mol), sold or manufactured by Mobil Chemicals;

- esters such as

30 - linear fatty acid esters having a total carbon number ranging from 30 to 70, such as pentaerythrityl tetrapelargonate (MM = 697.05 g/mol);

- hydroxylated esters such as diisostearyl malate (MM = 639 g/mol),

- aromatic esters such as tridecyl trimellitate (MM = 757.19 g/mol),
 - C₂₄-C₂₈ branched fatty acid or fatty alcohol esters, such as those described in EP-A- 0 955 039, and in particular triisocetyl citrate (MM = 865 g/mol), pentaerythrityl tetraisononanoate (MM = 697.05 g/mol), glyceryl triisostearate (MM = 891.51 g/mol), glyceryl 2-tridecyltetradecanoate (MM = 1 143.98 g/mol), pentaerythrityl tetraisostearate (MM = 1 202.02 g/mol), poly-2-glyceryl tetraisostearate (MM = 1 232.04 g/mol) or else pentaerythrityl 2-tetradecyltetradecanoate (MM = 1 538.66 g/mol),
 - oils of plant origin such as sesame oil (820.6 g/mol),
- and mixtures thereof.

In accordance with the invention, in the case of the abovementioned combinations, the term "polymer" refers to compounds containing at least two repeating units, preferably at least 3 repeating units and more especially at least 10 repeating units. The term "semi-crystalline polymer" refers to polymers containing a crystallizable portion, a crystallizable pendant chain or a crystallizable sequence in the skeleton, and an amorphous portion in the skeleton and having a first-order reversible phase-change temperature, in particular of fusion (solid-liquid transition). When the crystallizable portion is in the form of a crystallizable sequence of the polymeric skeleton, the amorphous portion of the polymer is in the form of an amorphous sequence; in this case the semi-crystalline polymer is a block copolymer of, for example, diblock, triblock or multiblock type comprising at least one crystallizable block and at least one amorphous block. A block generally comprises at least 5 identical repeating units. The crystallizable block or blocks are

then different in chemical nature from the amorphous block or blocks.

The semi-crystalline polymer according to the invention has a melting point of greater than or equal
5 to 30°C (in particular ranging from 30°C to 80°C), preferably ranging from 30°C to 60°C. This melting point is a first-order change-of-state temperature.

This melting point can be measured by any known method and in particular by means of a
10 differential scanning calorimeter (DSC).

Advantageously the semi-crystalline polymer or polymers to which the invention applies exhibit a number-average molecular mass of greater than or equal to 1 000.

15 Advantageously the semi-crystalline polymer or polymers of the composition of the invention have a number-average molecular mass \bar{M}_n ranging from 2 000 to 800 000, preferably from 3 000 to 500 000, better still from 4 000 to 150 000, and in particular less than
20 100 000, and better still from 4 000 to 99 000. Preferably they have a number-average molecular mass of more than 5 600, ranging for example from 5 700 to 99 000.

A crystallizable chain or block in the sense
25 of the invention is a chain or block which if it were alone would pass reversibly from the amorphous state to the crystalline state depending on whether the temperature was above or below the melting point. A chain in the sense of the invention is a group of atoms
30 which is pendant or lateral relative to the skeleton of the polymer. A block is a group of atoms belonging to the skeleton, the group constituting one of the repeating units of the polymer. Advantageously the "crystallizable pendant chain" may be a chain
35 containing at least 6 carbon atoms.

The crystallizable block(s) or chain(s) of the semi-crystalline polymers preferably represent at least 30% of the total weight of each polymer and better still at least 40%. The semi-crystalline polymers of the invention containing crystallizable blocks are block or multiblock polymers. They can be obtained by polymerizing monomers containing reactive double bonds (or ethylenic bonds) or by polycondensation. When the polymers of the invention are polymers containing crystallizable side chains they are advantageously in random or statistical form.

The semicrystalline polymers of the invention are preferably synthetic in origin. Moreover, they do not include a polysaccharide skeleton. Generally speaking, the crystallizable units (chains or blocks) of the semi-crystalline polymers according to the invention originate from one or more monomers containing crystallizable block(s) or chain(s) used for the preparation of the semi-crystalline polymers.

In accordance with the invention, the semi-crystalline polymer can be selected from block copolymers containing at least one crystallizable block and at least one amorphous block, homopolymers and copolymers carrying at least one crystallizable side chain per repeating unit, and mixtures thereof.

The semi-crystalline polymers which can be used in the invention are in particular:

- block polyolefin copolymers of controlled crystallization, particularly those whose monomers are described in EP-A-0 951 897,
- polycondensates, particularly those of aliphatic or aromatic, polyester type or aliphatic/aromatic copolyester type,
- homopolymers or copolymers carrying at least one crystallizable side chain and homopolymers or

copolymers carrying in the skeleton at least one crystallizable block, such as those described in US-A-5,156,911,

- homopolymers or copolymers carrying at least one crystallizable side chain, in particular containing one or more fluorine-containing groups, such as those described in WO-A-01/19333, and mixtures thereof. In these two latter cases the crystallizable side chain(s) or block(s) are hydrophobic.

A) Semi-crystalline polymers having crystallizable side chains

Mention may be made in particular of those defined in US-A-5,156,911 and WO-A-01/19333. These are homopolymers or copolymers containing from 50 to 100% by weight of units resulting from the polymerization of one or more monomers which carry a crystallizable hydrophobic side chain.

• These homopolymers or copolymers are of any kind, provided that they meet the conditions indicated above.


They may result

- from the polymerization, in particular the free-radical polymerization, of one or more monomers containing reactive or ethylenic double bond(s) in respect of a polymerization, namely containing a vinylic, (meth)acrylic or allylic group;

- from the polycondensation of one or more monomers which carry co-reactive groups (carboxylic or sulphonic acid, alcohol, amine or isocyanate), such as, for example, polyesters, polyurethanes, polyethers, polyureas and polyamides.

Generally speaking these polymers are selected in particular from homopolymers and copolymers

resulting from the polymerization of at least one crystallizable-chain monomer which can be represented by formula X:



5

with M representing an atom of the polymeric skeleton, S representing a spacer and C representing a crystallizable group.

10 The crystallizable chains "-S-C" may be aliphatic or aromatic, optionally fluorinated or perfluorinated. "S" represents in particular a (CH₂)_n or (CH₂CH₂O)_n or (CH₂O) group which is linear or branched or cyclic, with n being an integer ranging
15 from 0 to 22. "S" is preferably a linear group. Preferably "S" and "C" are different.

 When the crystallizable chains "-S-C" are aliphatic hydrocarbon chains, they contain alkyl hydrocarbon chains containing at least 11 carbon atoms
20 and not more than 40 carbon atoms, and better still not more than 24 carbon atoms. They are in particular aliphatic chains or alkyl chains possessing at least 12 carbon atoms and preferably the chains in question are C₁₄-C₂₄ alkyl chains. When the chains in question
25 are fluorinated or perfluorinated alkyl chains they contain at least 6 fluorinated carbon atoms and in particular at least 11 carbon atoms of which at least 6 carbon atoms are fluorinated.

 Examples of semi-crystalline polymers or
30 copolymers containing one or more crystallizable chains include those resulting from the polymerization of one or more monomers as follows: saturated alkyl

(meth)acrylates with the alkyl group C_{14} - C_{24} , perfluoro-alkyl (meth)acrylates with a C_{11} - C_{15} perfluoroalkyl group, N-alkyl(meth)acrylamides with a C_{14} to C_{24} alkyl group with or without a fluorine atom, vinyl esters
5 containing alkyl or perfluoro(alkyl) chains with a C_{14} to C_{24} alkyl group (with at least 6 fluorine atoms for a perfluoroalkyl chain), vinyl ethers containing alkyl or perfluoro(alkyl) chains with a C_{14} to C_{24} alkyl group and at least 6 fluorine atoms for a perfluoroalkyl
10 chain, C_{14} to C_{24} alpha-olefins such as, for example, octadecene, para-alkylstyrenes with an alkyl group containing 12 to 24 carbon atoms, and mixtures thereof.

When the polymers result from a polycondensation, the hydrocarbon and/or fluorinated
15 crystallizable chains as defined above are carried by a monomer which may be a diacid, a diol, a diamine or a diisocyanate.

When the polymers of the invention are copolymers, they also include from 0 to 50% of Y or Z
20 groups resulting from the copolymerization:

α) of Y, which is a polar or non-polar monomer or a mixture of the two:

- When Y is a polar monomer, it is either
25 a monomer which carries polyoxyalkylenated groups (especially oxyethylenated and/or oxypropylenated), a hydroxyalkyl (meth)acrylate such as hydroxyethyl acrylate, (meth)acrylamide, and N-alkyl(meth)-acrylamide, and N,N-dialkyl(meth)acrylamide such as,
30 for example, N,N-diisopropylacrylamide or N-vinylpyrrolidone (NVP), N-vinylcaprolactam, a monomer which carries at least one carboxylic acid group such as (meth)acrylic, crotonic, itaconic, maleic or fumaric acid or which carries a carboxylic anhydride group such
35 as maleic anhydride, and mixtures thereof.

• When Y is a non-polar monomer it may be an ester of the linear, branched or cyclic alkyl (meth)acrylate type, a vinyl ester, an alkyl vinyl ether, an alpha-olefin, styrene or styrene substituted by a C₁ to C₁₀ alkyl group, such as α -methylstyrene or a polyorganosiloxane-type macromonomer containing vinylic unsaturation.

"Alkyl" for the purposes of the invention is a saturated group, in particular a C₈ to C₂₄ group, unless specifically mentioned, and better still a C₁₄ to C₂₄ group.

β) of Z which is a polar monomer or a mixture of polar monomers. In this case Z has the same definition as "polar Y" defined above.

Semi-crystalline polymers containing a crystallizable side chain are preferably alkyl (meth)acrylate or alkyl(meth)acrylamide homopolymers with an alkyl group as defined above, and in particular C₁₄-C₂₄ group, copolymers of these monomers with a hydrophilic monomer, preferably of a different kind from (meth)acrylic acid, such as N-vinylpyrrolidone, or hydroxyethyl (meth)acrylate, and mixtures thereof.

B) Polymers carrying in the skeleton at least one crystallizable block

These polymers are, in particular, block copolymers consisting of at least 2 chemically different blocks of which one is crystallizable.

- It is possible to use the block polymers defined in patent US-A-5,156,911;

- block copolymers of olefin or of cycloolefin containing a crystallizable chain, such as those obtained from the block polymerization of:

- cyclobutene, cyclohexene, cyclooctene, norbornene (i.e. bicyclo[2.2.1]hept-2-ene), 5-methylnorbornene, 5-ethylnorbornene, 5,6-dimethylnorbornene, 5,5,6-trimethylnorbornene, 5-ethylidenenorbornene, 5-phenylnorbornene, 5-benzylnorbornene, 5-vinylnorbornene, 1,4,5,8-dimethano-1,2,3,4,4a,5,8a-octahydronaphthalene, dicyclopentadiene or mixtures thereof,
 - with ethylene, propylene, 1-butene, 3-methyl-1-butene, 1-hexene, 4-methyl-1-pentene, 1-octene, 1-decene, 1-eicosene or mixtures thereof,
 - and in particular block copoly(ethylene/norbornene) and block (ethylene/propylene/ethylidenenorbornene) terpolymers. It is also possible to use those resulting from the block copolymerization of at least two C₂-C₁₆ and better still C₂-C₁₂ and even better still C₄-C₁₂ α -olefins, such as those mentioned above, and in particular the block bipolymers of ethylene and of 1-octene.
- The copolymers may be copolymers having at least one crystallizable block, the remainder of the copolymer being amorphous (at ambient temperature). These copolymers may further comprise two chemically different crystallizable blocks. Preferred copolymers are those which possess at ambient temperature both a crystallizable block and an amorphous block which is both hydrophobic and lipophilic, the blocks being distributed sequentially; mention may be made, for example, of polymers possessing one of the following crystallizable blocks and one of the following amorphous blocks:
- Naturally crystallizable blocks, a) polyesters such as poly(alkylene terephthalate), b) polyolefins such as polyethylenes or polypropylenes.
 - Amorphous and lipophilic block, such as amorphous polyolefins or copoly(olefin)s such as

poly(isobutylene), hydrogenated polybutadiene and hydrogenated poly(isoprene).

Possible examples of such copolymers containing a crystallizable block and an amorphous block, the blocks being distinct, include:

5 α) block poly(ε-caprolactone)-b-poly(butadiene) copolymers, used preferably in hydrogenated form, such as those described in the article "Melting behavior of poly(ε-caprolactone)-
10 block-polybutadiene copolymers" by S. Nojima, *Macromolecules*, 32, 3727-3734 (1999).

 β) hydrogenated poly(butylene terephthalate)-b-poly(isoprene) block or multiblock copolymers, cited in the article "Study of morphological and mechanical
15 properties of PP/PBT" by B. Boutevin et al., *Polymer Bulletin*, 34, 117-123 (1995).

 γ) the poly(ethylene)-b-copoly(ethylene/-propylene) block copolymers cited in the articles "Morphology of semi-crystalline block copolymers of
20 ethylene-(ethylene-alt-propylene)" by P. Rangarajan et al., *Macromolecules*, 26, 4640-4645 (1993) and "Polymer aggregates with crystalline cores: the system poly(ethylene)-poly(ethylene-propylene)" by P. Richter et al., *Macromolécules*, 30, 1053-1068 (1997).


25 δ) the poly(ethylene)-b-poly(ethylethylene) block copolymers cited in the general article "Crystallization in block copolymers" by I.W. Hamley, *Advances in Polymer Science*, Vol. 148, 113-137 (1999).

The semi-crystalline polymers of the
30 composition of the invention may be non-crosslinked or partially crosslinked, provided that the degree of crosslinking is not detrimental to their dissolution or dispersion in the liquid fatty phase by heating above their melting point. This may then be a chemical
35 crosslinking, by reaction with a polyfunctional monomer

during the polymerization. It may also be a physical crosslinking, which may then be due either to the establishment of bonds of hydrogen type or dipolar type between groups carried by the polymer, such as, for example, the dipolar interactions between carboxylate ionomers, these interactions being low in quantity and borne by the polymer skeleton; or due to phase separation between the crystallizable blocks and the amorphous blocks carried by the polymer.

10 The semi-crystalline polymers of the composition according to the invention are preferably non-crosslinked.

 According to one particular embodiment of the invention, the polymer is selected from copolymers
15 resulting from the polymerization of at least one monomer containing a crystallizable chain, selected from saturated C₁₄ to C₂₄ alkyl (meth)acrylates, C₁₁ to C₁₅ perfluoroalkyl (meth)acrylates, C₁₄ to C₂₄ N-alkyl-(meth)acrylamides with or without a fluorine atom,
20 vinyl esters containing C₁₄ to C₂₄ alkyl or perfluoroalkyl chains, vinyl ethers containing C₁₄ to C₂₄ alkyl or perfluoroalkyl chains, C₁₄ to C₂₄ alpha-olefins, para-alkylstyrenes with an alkyl group containing 12 to 24 carbon atoms, with at least one
25 optionally fluorinated C₁ to C₁₀ monocarboxylic ester or amide, which can be represented by the following formula:



30 in which R₁ is H or CH₃, R represents an optionally fluorinated C₁-C₁₀ alkyl group and X represents O, NH or NR₂, where R₂ represents an optionally fluorinated C₁-C₁₀ alkyl group.

According to one more particular embodiment of the invention the polymer is derived from a monomer containing a crystallizable chain, selected from saturated C₁₄ to C₂₂ alkyl (meth)acrylates.

5 As a specific example of a structuring semi-crystalline polymer that can be used in the composition according to the invention, mention may be made of the Interlimer® products from Landec which are described in the brochure "Interlimer® polymers", Landex IP22
10 (Rev. 4-97). These polymers are in solid form at ambient temperature (25°C). They carry crystallizable side chains and have the above formula X.

The semi-crystalline polymers may in particular be: those described in Examples 3, 4, 5, 7,
15 9 and 13 of patent US-A-5,156,911 containing a -COOH group, resulting from the copolymerization of acrylic acid and C₅ to C₁₆ alkyl (meth)acrylate, and more particularly from the copolymerization:

- of acrylic acid, hexadecyl acrylate and
20 isodecyl acrylate in a 1/16/3 weight ratio,
- of acrylic acid and pentadecyl acrylate in a 1/19 weight ratio,
- of acrylic acid, hexadecyl acrylate and ethyl acrylate in a 2.5/76.5/20 weight ratio,
- 25 • of acrylic acid, hexadecyl acrylate and methyl acrylate in a 5/85/10 weight ratio,
- of acrylic acid and octadecyl methacrylate in a 2.5/97.5 weight ratio,
- of hexadecyl acrylate, polyethylene
30 glycol methacrylate monomethyl ether containing 8 ethylene glycol units, and acrylic acid in an 8.5/1/0.5 weight ratio.

It is also possible to use the structure "O" from National Starch, as described in US-A-5,736,125,
35 with a melting point of 44°C, and also semi-crystalline

polymers containing crystallizable pendant chains containing fluorinated groups, as described in Examples 1, 4, 6, 7 and 8 of WO-A-01/19333.

5 It is additionally possible to use the semi-crystalline polymers obtained by copolymerizing stearyl acrylate and acrylic acid or NVP, as described in US-A-5 519 063 or EP-A-550745, with melting points of 40°C and 38°C respectively.

10 It is also possible to use semi-crystalline polymers obtained by copolymerizing behenyl acrylate and acrylic acid or NVP, as described in US-A-5,519,063 and EP-A-550745 with melting points of 60°C and 58°C respectively.

15 The semi-crystalline polymers with low melting point or with high melting point preferably do not contain a carboxyl group.

Advantageously, the association of a semi-crystalline polymer and at least one oil has a tack from 1 to 5 N.s and a hardness from 0,1 to 20 MPa.

20 The other abovementioned combinations may comprise the combination of a rheological agent with at least one oil.

25 This rheological agent is capable of thickening and/or gelling the oil phase. It may be present in an amount which is effective for increasing the viscosity of this phase, particularly until a solid gel is obtained, namely a product which does not flow under its own weight.

30 The rheological agent is advantageously selected from lipophilic gelling agents, organic gellers and mixtures thereof.

The lipophilic gelling agent may be organic or mineral, polymeric or molecular.

35 As inorganic lipophilic gelling agent mention may be made of optionally modified clays, such as

hectorites modified with a C₁₀ to C₂₂ fatty acid ammonium chloride, such as hectorite modified with distearyldimethylammonium chloride.

5 Mention may also be made of optionally surface-hydrophobicized pyrogenic silica whose particle size is less than 1 µm. It is possible in effect to modify chemically the surface of the silica, by a chemical reaction which brings about a decrease in the number of silanol groups present on the surface of the
10 silica. In particular it is possible to substitute the silanol groups by hydrophobic groups: in that case a hydrophobic silica is obtained. The hydrophobic groups may be

 - trimethylsiloxyl groups, obtained in
15 particular by treating pyrogenic silica in the presence of hexamethyldisilazane. Silicas treated in this way are named "silica silylate" according to the CTFA (6th edition, 1995). They are sold, for example, under the names Aerosil R812® by Degussa and CAB-O-SIL TS-530® by
20 Cabot.

 - dimethylsilyloxyl or polydimethylsiloxane groups, obtained in particular by treating pyrogenic silica in the presence of polydimethylsiloxane or dimethyldichlorosilane. Silicas treated in this way are
25 named "silica dimethyl silylate" according to the CTFA (6th edition, 1995). They are sold for example under the names Aerosil R972®, Aerosil R974® by Degussa and CAB-O-SIL TS-610® and CAB-O-SIL TS-720® by Cabot.

 The hydrophobic pyrogenic silica preferably
30 has a particle size which can be nanometric to micrometric, ranging for example from 5 to 200 nm approximately.

 The polymeric organic lipophilic gelling agents are, for example, partly or completely
35 crosslinked elastomeric organopolysiloxanes of three-

dimensional structure, such as those sold under the names KSG6, KSG16 and KSG18 by Shin-Etsu, Trefil E-505C or Trefil E-506C by Dow-Corning, Gransil SR-CYC, SR DMF10, SR-DC556, SR 5CYC gel, SR DMF 10 gel, SR DC 556 gel from Grant Industries, SF 1204 and JK 113 by General Electric; ethylcellulose such as those sold under the name Ethocel by Dow Chemical; polyamides such as copolymers of a C₃₆ diacid condensed with ethylenediamine, with a number-average molecular mass of approximately 6000, such as the compounds sold by Arizona Chemical under the names Uniclear 80 and Uniclear 100, gums, especially silicone gums, such as PDMS having a viscosity > 100 000 centistokes, galactomannans containing from one to six and better still from two to four hydroxyl groups per saccharide unit, substituted by a saturated or unsaturated alkyl chain, such as guar gum alkylated with C₁ to C₆ alkyl chains and better still C₁ to C₃ alkyl chains, and mixtures thereof.

As preferred lipophilic gelling agent, use is made of non-polymeric molecular organic gelling agents, also dubbed organic gellers, which are compounds whose molecules are capable of establishing, between themselves, physical interactions leading to self-aggregation of the molecules with formation of a 3D macromolecular network which is responsible for the gelation of the liquid fatty phase.

A liquid fatty phase in the sense of the invention is a fatty phase which is liquid at ambient temperature (25°C) and atmospheric pressure (760 mmHg or 105 Pa) and is composed of one or more fatty substances which are liquid at ambient temperature, also called oils, which are generally mutually compatible.

The macromolecular network may result from the formation of a network of fibrils (owing to stacking or aggregation of organic geller molecules), which immobilizes the molecules of the liquid fatty
5 phase.

The ability to form this network of fibrils, and hence to gel, depends on the nature (or chemical class) of the organic geller, on the nature of the substituents carried by its molecules for a given
10 chemical class, and on the nature of the liquid fatty phase.

The physical interactions are diverse but exclude co-crystallization. These physical interactions are, in particular, interactions such as self-
15 complementary hydrogen interactions, π interactions between unsaturated rings, dipolar interactions, coordination bonds with organometallic derivatives, and combinations thereof. In general, each molecule of an organic geller can establish a number of types of
20 physical interaction with a neighbouring molecule. Thus, advantageously, the molecules of the organic gellers according to the invention include at least one group capable of establishing hydrogen bonds and, better still, at least two groups capable of
25 establishing hydrogen bonds, at least one aromatic ring, and better still at least two aromatic rings, at least one or more bonds with ethylenic unsaturation and/or at least one or more asymmetric carbons. The groups capable of forming hydrogen bonds are preferably
30 selected from hydroxyl, carbonyl, amine, carboxylic acid, amide, urea and benzyl groups and combinations thereof.

The organic geller or gellers according to the invention are soluble in the liquid fatty phase
35 after heating to give a transparent homogeneous liquid

phase. They may be solid or liquid at ambient temperature and atmospheric pressure.

The molecular organic geller or gellers which can be used in the composition according to the invention are, in particular, those described in the document "Specialist Surfactants", edited by D. Robb, 1997, p. 209-263, Chapter 8 by P. Terech, European applications EP-A-1068854 and EP-A-1086945 or else application WO-A-02/47031.

Among these organic gellers mention may be made in particular of the amides of carboxylic acids, especially tricarboxylic acids, such as cyclohexane-tricarboxamides (see European patent application EP-A-1068854), diamides having hydrocarbon chains each containing 1 to 22 carbon atoms, for example 6 to 18 carbon atoms, the said chains being unsubstituted or substituted by at least one substituent selected from ester, urea and fluoro groups (see application EP-A-1086945), and in particular the diamides resulting from the reaction of diaminocyclohexane, in particular diaminocyclohexane in trans form, and an acid chloride such as, for example, N,N'-bis(dodecanoyl)-1,2-diaminocyclohexane, the amides of N-acylamino acids such as the diamides resulting from the action of an N-acylamino acid with amines containing 1 to 22 carbon atoms, such as, for example, those described in WO-93/23008, and especially the amides of N-acylglutamic acid in which the acyl group represents a C₈ to C₂₂ alkyl chain, such as N-lauroyl-L-glutamic acid dibutyl amide, manufactured or sold by Ajinomoto under the name GP-1, and mixtures thereof.

The compositions may contain from 10 to 60% of structuring agent present in the fatty phase. Preferably the composition contains from 15 to 50% by weight, better still from 20 to 40%, of structuring

agent, which allows total solids contents to be attained in the composition of more than 45%, preferably more than 46%, better still more than 47%, even better more than 48%, and even more than 50%.

5

One example of a "tacky wax"-type structuring unit corresponding to the invention is the following:

Commercial name: Kester wax K82P and Kester wax K 80P from Koster Keunen

10 Tack = 3.38 N.s

Hardness = 0.96 MPa

An example of a structuring agent corresponding to the invention, consisting of a semi-crystalline polymer in combination with an oil, is the following:

15

Fatty phase = polybutene(1)/stearyl acrylate-N-vinylpyrrolidone (40/60) copolymer (2) with a melting point of 56°C.

(1): Indopol H 100 from AMOCO

20

(2): Basic polymer with a melting point of 56°C, prepared in accordance with the following procedure:

A 11 reactor equipped with a central stirrer with anchor, a condenser and a thermometer is charged with 120 g of cyclohexane, which is heated from the ambient temperature to 80°C over 45 min. At 80°C, over the course of 2h, the following mixture C₁ is introduced:

40 g of cyclohexane + 4 g of Triganox 141 [2,5-bis(2-ethylhexanoylperoxy)-2,5-dimethylhexane].

30

30 min after the beginning of the introduction of the mixture C₁, the mixture C₂ is introduced, over 1h30 min, this mixture C₂ consisting of:

190 g of stearyl acrylate + 10 g of N-vinylpyrrolidone + 400 g of cyclohexane.

After the two feeds, the mixture is left for 3h more at 80°C and then all of the cyclohexane present
5 in the reaction mixture is distilled off under atmospheric pressure.

This gives the polymer with an active substance content of 100% by weight.

Its weight-average molecular mass M_w is
10 38 000, expressed in polystyrene equivalents, and its melting point T_f is 56°C as measured by DSC.

Tack = 2.63 N.s

Hardness = 5.84 Mpa.

15 The composition according to the invention is a makeup composition, a makeup base (called "basecoat"), a topcoat composition to be applied over makeup, or a composition for cosmetic treatment or care of keratin fibres.

20 The composition according to the invention is applied more particularly to the eyelashes. Consequently the composition of the invention may be a composition for coating the eyelashes, in particular a composition for making up the eyelashes, also called
25 mascara, a composition to be applied to an eyelash makeup, also called a topcoat, or else a composition for treating the eyelashes, in particular the eyelashes of human beings or false eyelashes. More especially the composition is a mascara.

30 The invention also pertains to a cosmetic method of treating or making up keratin fibres, which comprises applying to the said keratin fibres the composition as described earlier on.

The invention also relates to a method of
35 coating the eyelashes which comprises the application

to the eyelashes of the composition described above.

The invention further relates to the use of the composition as described earlier on for making up keratin materials or fibres and to the use of this
5 composition for obtaining easy and homogeneous application and a makeup which exhibits an excellent volumizing effect and which permits a rapid makeup for the keratin fibres.

The composition according to the invention
10 forms a physiologically acceptable medium. The present specification a physiologically acceptable medium is a non-toxic medium which is compatible with the keratin fibres of human beings, in particular the eyelashes or eyebrows, such as a cosmetic medium, the cosmetic
15 medium being either a hydrophilic or a lipophilic cosmetic medium.

The composition may comprise water and optionally one or more hydrophilic organic solvents, i.e. one or more water-miscible organic solvents, such
20 as alcohols and especially monoalcohols having 2 to 5 carbon atoms, such as ethanol, isopropanol or n-propanol, polyols having 2 to 8 carbon atoms, such as glycerol, diglycerol, propylene glycol, ethylene glycol, 1,3-butylene glycol, sorbitol, pentylene
25 glycol, C₃-C₄ ketones and C₂-C₄ aldehydes.

The water or the mixture of water and hydrophilic organic solvent(s) may be present in the composition according to the invention in an amount ranging from 0.1% to 90% by weight relative to the
30 total weight of the composition, and preferably from 0.1 to 60 % by weight.

The composition according to the invention may further comprise an additional wax other than the tackifying wax described hitherto.

The additional wax may be selected for example from beeswax, paraffin waxes, hydrogenated castor oil and silicone waxes.

5 The waxes (the tackifier wax and/or the additional waxes) present in the composition may be dispersed in particle form in an aqueous medium. In particular the wax may be present in the form of a wax-in-water emulsion.

10 The additional wax may be present in the composition according to the invention in an amount ranging from 0.1% to 50% by weight relative to the total weight of the composition, preferably from 0.5% to 30% by weight, and better still from 1% to 20% by weight.

15 The composition according to the invention may comprise at least one fatty compound which is pastelike at ambient temperature. A pastelike fatty substance in the sense of the invention is a fatty substance having a melting point ranging from 20 to 20 55°C, preferably from 25 to 45°C, and/or a viscosity at 40°C ranging from 0.1 to 40 Pa.s (1 to 400 poises), preferably 0.5 to 25 Pa.s measured on the Contraves TV or Rheomat 80, equipped with a rotor rotating at 60 Hz. The skilled worker is able to select the rotor which 25 allows the viscosity to be measured, from the rotors MS-r₃ and MS-r₄, on the basis of his or her general knowledge, so as to be able to carry out measurement on the pastelike test compound.

30 These fatty substances are preferably hydrocarbon compounds, optionally of polymeric type; they may also be selected from silicone compounds; they may also be in the form of a mixture of hydrocarbon compounds and/or silicone compounds. In the case of a mixture of different pastelike fatty substances it is 35 preferred to use pastelike hydrocarbon compounds

(containing primarily carbon atoms and hydrogen atoms and optionally ester groups) in majority proportion.

Among the pastelike compounds which can be used in the composition according to the invention, mention may be made of lanolins and lanolin derivatives such as acetylated lanolins or oxypropylenated lanolins or isopropyl lanolate having a viscosity of 18 to 21 Pa.s, preferably 19 to 20.5 Pa.s, and/or a melting point of 30 to 55°C, and mixtures thereof. It is also possible to use esters of fatty alcohols or acids, particularly those having 20 to 65 carbon atoms (melting point of the order of 20 to 35°C and/or viscosity at 40°C ranging from 0.1 to 40 Pa.s) such as triisostearyl or cetyl citrate; arachidyl propionate; polyvinyl laurate; cholesterol esters such as triglycerides of plant origin, such as hydrogenated vegetable oils, viscous polyesters such as poly(12-hydroxystearic) acid, and mixtures thereof.

Mention may also be made of silicone pastelike fatty substances such as polydimethylsiloxanes (PDMS) having pendant chains of the alkyl or alkoxy type having 8 to 24 carbon atoms, and a melting point of 20-55°C, such as stearyldimethicones, especially those sold by Dow Corning under the trade names DC2503 and DC25514, and mixtures thereof.

The pastelike fatty substance may be present in the composition according to the invention in an amount ranging from 0.01 to 60% by weight relative to the total weight of the composition, preferably ranging from 0.5 to 45% by weight, and better still ranging from 2% to 30% by weight, in the composition.

The composition according to the invention may comprise emulsifying surfactants present in particular in a proportion ranging from 2 to 30% by weight relative to the total weight of the composition,

and better still from 5% to 15%. These surfactants may be selected from anionic surfactants and non-ionic surfactants. Reference may be made to Encyclopedia of Chemical Technology, Kirk-Othmer, Volume 22, 5 pp. 333-432, 3rd edition, 1979, Wiley, for the definition of the properties and functions (emulsifier) of the surfactants, in particular to pp. 347-377 of this reference, for anionic and non-ionic surfactants.

The surfactants used preferentially in the 10 composition according to the invention are selected:

- from non-ionic surfactants: fatty acids, fatty alcohols, polyethoxylated or polyglycerolated fatty alcohols such as polyethoxylated stearyl or cetylstearyl alcohols, esters of fatty acid and 15 sucrose, esters of alkyl glucose, in particular polyoxyethylenated fatty C₁-C₆ alkyl glucose esters, and mixtures thereof.

- from anionic surfactants: C₁₆-C₃₀ fatty acids neutralized with amines, aqueous ammonia or 20 alkali metal salts, and mixtures thereof.

Preference is given to using surfactants which allow an oil-in-water or wax-in-water emulsion to be obtained.

The composition according to the invention 25 may comprise at least one film-forming polymer.

The film-forming polymer may be present in the composition according to the invention in a solids content ranging from 0.1% to 60% by weight relative to the total weight of the composition, preferably from 30 0.5% to 40% by weight, and better still from 1% to 30% by weight.

In the present specification the term "film-forming polymer" refers to a polymer which is capable, by itself or in the presence of an auxiliary film- 35 forming agent, of forming a continuous and adherent

film on a support, in particular on keratin materials such as the eyelashes.

5 Among the film-forming polymers which may be used in the composition of the present invention, mention may be made of synthetic polymers, of free-radical type or of polycondensate type, and of polymers of natural origin, and mixtures thereof.

10 A free-radical film-forming polymer is a polymer obtained by polymerizing monomers containing unsaturation, in particular ethylenic unsaturation, each monomer being capable of undergoing homopolymerization (unlike polycondensates).

15 The film-forming polymers of free-radical type may in particular be vinyl polymers or copolymers, especially acrylic polymers.

20 The vinyl film-forming polymers may result from the polymerization of monomers containing ethylenic unsaturation and having at least one acidic group and/or of esters of these acidic monomers and/or of amides of these acidic monomers.

25 As acid-group-bearing monomer it is possible to use α,β -ethylenic unsaturated carboxylic acids such as acrylic acid, methacrylic acid, crotonic acid, maleic acid and itaconic acid. It is preferred to use (meth)acrylic acid and crotonic acid, and more preferably (meth)acrylic acid.

30 The esters of acidic monomers are advantageously selected from esters of (meth)acrylic acid (also called (meth)acrylates), in particular alkyl (meth)acrylates, especially C_1 - C_{30} , preferably C_1 - C_{20} , alkyl (meth)acrylates, aryl (meth)acrylates, especially C_6 - C_{10} aryl (meth)acrylates, and hydroxyalkyl (meth)acrylates, in particular C_2 - C_6 hydroxyalkyl (meth)acrylates.
35

Among alkyl (meth)acrylates mention may be made of methyl methacrylate, ethyl methacrylate, butyl methacrylate, isobutyl methacrylate, 2-ethylhexyl methacrylate, lauryl methacrylate and cyclohexyl methacrylate.

Among hydroxyalkyl (meth)acrylates mention may be made of hydroxyethyl acrylate, 2-hydroxypropyl acrylate, hydroxyethyl methacrylate, and 2-hydroxypropyl methacrylate.

Among aryl (meth)acrylates mention may be made of benzyl acrylate and phenyl acrylate.

Particularly preferred esters of (meth)acrylic acid are alkyl (meth)acrylates.

According to the present invention the alkyl group of the esters can be either fluorinated or perfluorinated: in other words, some or all of the hydrogen atoms of the alkyl group are substituted by fluorine atoms.

Possible examples of amides of acidic monomers include (meth)acrylamides, and especially N-alkyl(meth)acrylamides, particularly where the alkyl is C₂-C₁₂. Among N-alkyl(meth)acrylamides mention may be made of N-ethylacrylamide, N-t-butylacrylamide, N-t-octylacrylamide and N-undecylacrylamide.

The vinyl film-forming polymers may also result from the homopolymerization or copolymerization of monomers selected from vinyl esters and styrenic monomers. In particular these monomers can be polymerized with acidic monomers and/or their esters and/or their amides, such as those mentioned hitherto.

Possible examples of vinyl esters include vinyl acetate, vinyl neodecanoate, vinyl pivalate, vinyl benzoate and vinyl t-butyl benzoate.

Styrenic monomers include styrene and alpha-methylstyrene.

Film-forming polycondensates include polyurethanes, polyesters, polyester amides, polyamides, epoxy ester resins and polyureas.

5 Polyurethanes may be selected from anionic, cationic, non-ionic or amphoteric polyurethanes, acrylic polyurethanes, polyurethane-polyvinylpyrrolidones, polyester-polyurethanes, polyether-polyurethanes, polyureas, polyurea-polyurethanes, and mixtures thereof.

10 Polyesters may be obtained conventionally by polycondensation of dicarboxylic acids with polyols, especially diols.

The dicarboxylic acid may be aliphatic, alicyclic or aromatic. Possible examples of such acids include oxalic acid, malonic acid, dimethylmalonic acid, succinic acid, glutaric acid, adipic acid, pimelic acid, 2,2-dimethylglutaric acid, azelaic acid, suberic acid, sebacic acid, fumaric acid, maleic acid, itaconic acid, phthalic acid, dodecanedioic acid, 1,3-cyclohexanedicarboxylic acid, 1,4-cyclohexanedicarboxylic acid, isophthalic acid, terephthalic acid, 2,5-norbornanedicarboxylic acid, diglycolic acid, thiodipropionic acid, 2,5-naphthalenedicarboxylic acid, 2,6-naphthalenedicarboxylic acid. These dicarboxylic acid monomers may be used alone or in a combination of at least two dicarboxylic acid monomers. Among these monomers it is preferred to select phthalic acid, isophthalic acid and/or terephthalic acid.

30 The diol may be selected from aliphatic, alicyclic and aromatic diols. It is preferred to use a diol selected from ethylene glycol, diethylene glycol, triethylene glycol, 1,3-propanediol, cyclohexanediol and 1,4-butanediol. As other polyols it is possible to use glycerol, pentaerythritol, sorbitol and trimethylolpropane.

The polyester amides may be obtained in a similar way to the polyesters, by a polycondensation of diacids with diamines or amino alcohols. As diamine it is possible to use ethylenediamine, hexamethylenediamine, meta- or para-phenylenediamine. As an amino
5 alcohol it is possible to use monoethanolamine.

The polyester may further comprise at least one monomer which carries at least one group $-SO_3M$, with M representing a hydrogen atom, an ammonium ion NH_4^+ or a metal ion, such as, for example, an Na^+ , Li^+ ,
10 K^+ , Mg^{2+} , Ca^{2+} , Cu^{2+} , Fe^{2+} or Fe^{3+} ion. It is also possible to use in particular a difunctional aromatic monomer containing such a group $-SO_3M$.

The aromatic nucleus of the difunctional
15 aromatic monomer additionally carrying a group $-SO_3M$ as described above may be selected, for example, from benzene, naphthalene, anthracene, biphenyl, oxybiphenyl, sulphonylbiphenyl and methylenebiphenyl nuclei. As examples of a difunctional aromatic monomer
20 further carrying a group $-SO_3M$, mention may be made of the following: sulphoisophthalic acid, sulphoterephthalic acid, sulphophthalic acid and 4-sulphonaphthalene-2,7-dicarboxylic acid.

Preference is given to using copolymers based
25 on isophthalate/sulphoisophthalate, and more particularly copolymers obtained by condensing diethylene glycol, cyclohexanedimethanol, isophthalic acid and/or sulphoisophthalic acid.

The optionally modified polymers of natural
30 origin may be selected from shellac resin, gum sandarac, dammars, elemis, copals, cellulosic polymers, and mixtures thereof.

In accordance with a first embodiment of the composition according to the invention, the film-
35 forming polymer may be a water-soluble polymer and may

be present in an aqueous phase of the composition; the polymer is therefore solubilized in the aqueous phase of the composition. Possible examples of water-soluble film-forming polymers include:

- 5 - proteins such as proteins of plant origin, such as wheat proteins and soya proteins; proteins of animal origin such as keratins, for example keratin hydrolysates and sulphonic keratins;
- cellulose polymers such as hydroxyethyl-
10 cellulose, hydroxypropylcellulose, methylcellulose, ethylhydroxyethylcellulose and carboxymethylcellulose, and quaternized cellulose derivatives;
- acrylic polymers or copolymers, such as polyacrylates or polymethacrylates;
- 15 - vinyl polymers, such as polyvinylpyrrolidones, copolymers of methyl vinyl ether and malic anhydride, the copolymer of vinyl acetate and crotonic acid, copolymers of vinylpyrrolidone and vinyl acetate; copolymers of vinylpyrrolidone and
20 caprolactam; and polyvinyl alcohol;
- polymers of natural origin, optionally modified, such as:
 - gums arabic, guar gum, xanthan derivatives and karaya gum;
 - 25 • alginates and carragheenanans;
 - glycoaminoglycans and hyaluronic acid and its derivatives;
 - shellac resin, gum sandarac, dammars, elemis and copals;
 - 30 • deoxyribonucleic acid;
 - mucopolysaccharides such as chondroitin sulphates,
- and mixtures thereof.

 In accordance with another variant embodiment
35 of the composition according to the invention, the

film-forming polymer may be a polymer which is solubilized in a liquid fatty phase comprising oils or organic solvents such as those described hitherto (in which case the film-forming polymer is referred to as a fat-soluble polymer). A "liquid fatty phase" for the purposes of the invention is a fatty phase which is liquid at ambient temperature (25°C) and atmospheric pressure (760 mmHg or 105 Pa), which is composed of one or more fatty substances which are liquid at ambient temperature, also called oils, which are generally compatible with one another.

The liquid fatty phase preferably comprises a volatile oil, optionally in a mixture with a non-volatile oil, the oils being selectable from the abovementioned oils.

Possible examples of fat-soluble polymers include vinyl ester copolymers (the vinyl group being connected directly to the oxygen atom of the ester group and the vinyl ester having a saturated, linear or branched hydrocarbon radical of 1 to 19 carbon atoms which is linked to the carbonyl of the ester group) with at least one other monomer which may be a vinyl ester (other than the vinyl ester already present), an α -olefin (having 8 to 28 carbon atoms), an alkyl vinyl ether (in which the alkyl group contains 2 to 18 carbon atoms) or an allyl or methallyl ester (having a saturated, linear or branched hydrocarbon radical of 1 to 19 carbon atoms which is linked to the carbonyl of the ester group).

These copolymers may be crosslinked by means of crosslinkers which can be either of vinyl type or of allyl or methallyl type, such as tetraallyloxyethane, divinylbenzene, divinyl octanedioate, divinyl dodecanedioate and divinyl octadecanedioate.

As examples of these polymers mention may be made of the following copolymers: vinyl acetate/allyl stearate, vinyl acetate/vinyl laurate, vinyl acetate/vinyl stearate, vinyl acetate/octadecene, vinyl acetate/octadecyl vinyl ether, vinyl propionate/allyl laurate, vinyl propionate/vinyl laurate, vinyl stearate/1-octadecene, vinyl acetate/1-dodecene, vinyl stearate/ethyl vinyl ether, vinyl propionate/cetyl vinyl ether, vinyl stearate/allyl acetate, vinyl 2,2-dimethyloctanoate/vinyl laurate, allyl 2,2-dimethylpentanoate/vinyl laurate, vinyl dimethylpropionate/vinyl stearate, allyl dimethylpropionate/vinyl stearate, vinyl propionate/vinyl stearate, crosslinked with 0.2% of divinylbenzene, vinyl dimethylpropionate/vinyl laurate, crosslinked with 0.2% of divinylbenzene, vinyl acetate/octadecyl vinyl ether, crosslinked with 0.2% of tetraallyloxyethane, vinyl acetate/allyl stearate, crosslinked with 0.2% of divinylbenzene, vinyl acetate/1-octadecene crosslinked with 0.2% of divinylbenzene, and allyl propionate/allyl stearate crosslinked with 0.2% of divinylbenzene.

Fat-soluble film-forming polymers also include fat-soluble copolymers, and in particular those resulting from the copolymerization of vinyl esters having 9 to 22 carbon atoms or alkyl acrylates or methacrylates, the alkyl radicals having 10 to 20 carbon atoms.

Fat-soluble copolymers of this kind may be selected from copolymers of polyvinyl stearate, polyvinyl stearate crosslinked using divinylbenzene, diallyl ether or diallyl phthalate, copolymers of polystearyl (meth)acrylate, polyvinyl laurate, polylauryl (meth)acrylate, it being possible for these poly(meth)acrylates to be crosslinked using ethylene

glycol dimethacrylate or tetraethylene glycol dimethacrylate.

The fat-soluble homopolymers and copolymers defined above are known and are described in particular
5 in the application FR-A-2232303; they can have a weight-average molecular weight ranging from 2000 to 500 000 and preferably from 4000 to 200 000.

As fat-soluble film-forming polymers which can be used in the invention, mention may also be made
10 of polyalkylenes and especially the copolymers of C_2 - C_{20} alkenes, such as polybutene, alkylcelluloses with a linear or branched, saturated or unsaturated C_1 to C_8 alkyl radical such as ethylcellulose and propylcellulose, vinylpyrrolidone (VP) copolymers and
15 especially the copolymers of vinylpyrrolidone and a C_2 to C_{40} or, better still, C_3 to C_{20} alkene. Possible examples of VP copolymers which can be used in the invention include VP/vinyl acetate, VP/ethyl methacrylate, butylated polyvinylpyrrolidone (PVP),
20 VP/ethyl methacrylate/methacrylic acid, VP/eicosene, VP/hexadecadene, VP/triacontene, VP/styrene and VP/acrylic acid/lauryl methacrylate copolymer.

The composition according to the invention
25 may comprise a plasticizer which promotes the formation of a film with the film-forming polymer. Such a plasticizer may be selected from all compounds known to the person skilled in the art as being capable of fulfilling the desired function.

30 The composition according to the invention may further comprise a colorant such as pulverulent colorants, fat-soluble colorants and water-soluble colorants. This colorant may be present in an amount ranging from 0.01% to 30% by weight, relative to the
35 total weight of the composition.

The pulverulent colorants may be selected from pigments and nacres.

The pigments can be white or coloured, mineral and/or organic, and coated or uncoated. The mineral pigments include titanium dioxide, optionally surface-treated, zirconium oxide, zinc oxide or cerium oxide, and also iron oxides or chromium oxides, manganese violet, ultramarine blue, chromium hydrate and ferric blue. The organic pigments include carbon black, pigments of D & C type, and lakes based on cochineal carmine, barium, strontium, calcium and aluminium.

The nacres may be selected from white nacreous pigments such as mica coated with titanium or with bismuth oxychloride, coloured nacreous pigments such as titanium mica with iron oxides, titanium mica with, in particular, ferric blue or chromium oxide, titanium mica with an organic pigment of the type mentioned above, and nacreous pigments based on bismuth oxychloride.

Fat-soluble dyes are, for example, Sudan Red, D&C Red 17, D&C Green 6, β -carotene, soya oil, Sudan Brown, D&C Yellow 11, D&C Violet 2, D&C Orange 5, quinoline yellow and annatto. Water-soluble dyes are, for example, beetroot juice, methylene blue, the disodium salt of ponceau, the disodium salt of alizarin green, quinoline yellow, the trisodium salt of amaranth, the disodium salt of tartrazine, the monosodium salt of rhodamine, the disodium salt of fuschsin and xanthophyll.

The composition of the invention may further comprise any cosmetic additive commonly used in cosmetology, such as antioxidants, fillers, preservatives, perfumes, neutralizing agents, thickeners, surfactants, cosmetic or dermatological

active agents, plasticizers, coalescents and mixtures thereof.

According to one particular embodiment of the invention the composition contains no UV filter
5 (organic filter or mineral filter; a filter which absorbs or reflects ultraviolet radiation).

The person skilled in the art will of course take care to select any complementary additives and/or their amount such that the advantageous properties of
10 the composition according to the invention are not, or not substantially, adversely affected by the intended addition.

The composition according to the invention may be manufactured by the known processes which are
15 generally used within the cosmetics field.

The invention will now be described with reference to the following examples, which are given by way of illustration and are not limitative.

Before going into more detail in these
20 examples we will set out the protocols for measuring the various parameters which allow the present invention to be defined, namely the solids content, the tack value, the hardness and the adhesion profile.

25 Tack measurement protocol

The tack of the wax is measured at 20°C using a texturometer sold under the name TA-XT2i by Rheo, equipped with an acrylic polymer traveller in the shape
30 of a cone forming an angle of 45°, by measuring the change in the force (compressive force or stretching force) (F) as a function of the time during the following operation:

The traveller is moved at a speed of 0.5 mm/s
35 and then penetrates the wax to a depth of 2 mm. When

the traveller has penetrated the wax to the depth of 2 mm, the traveller is held fixed for 1 second (corresponding to the relaxation time) and then withdrawn at a speed of 0.5 mm/s. During the relaxation
5 time the force (compressive force) decreases sharply to reach zero and then, during the withdrawal of the traveller, the force (stretching force) becomes negative before again increasing towards the value 0. The tack corresponds to the integral of the curve of
10 force as a function of time for the portion of the curve corresponding to negative values of the force (stretching force). The value of the tack is expressed in N.s.

To carry out the measurement of the tack of
15 the wax, the wax is melted at a temperature equal to the melting point of the wax +10°C. The melted wax is poured into a container 25 mm in diameter and 20 mm in depth. The wax is recrystallized at ambient temperature (25°C) for 24 hours such that the surface of the wax is
20 flat and smooth, and then the wax is stored for at least 1 hour at 20°C before the tack measurement is carried out.

Hardness measurement protocol

25 The hardness of the wax is measured at 20°C using a texturometer sold under the name TA-XT2i by Rheo, equipped with a stainless steel traveller in the shape of a cylinder with a diameter of 2 mm, by measuring the change in the force (compressive force or
30 stretching force) (F) as a function of the time during the following operation:

The traveller is moved at a speed of 0.1 mm/s and then penetrates the wax to a depth of 0.3 mm. When the traveller has penetrated the wax to the depth of
35 0.3 mm, the traveller is held fixed for 1 second

(corresponding to the relaxation time) and then withdrawn at a speed of 0.1 mm/s. During the relaxation time the force (compressive force) decreases sharply to reach zero and then, during the withdrawal of the traveller, the force (stretching force) becomes negative before again increasing towards the value 0. The hardness corresponds to the maximum compressive force measured between the surface of the traveller and the wax at the moment they are contacted. The value of this force is expressed in MPa.

To carry out the measurement of the hardness of the wax, the wax is melted at a temperature equal to the melting point of the wax +20°C. The melted wax is poured into a container 30 mm in diameter and 20 mm in depth. The wax is recrystallized at ambient temperature (25°C) for 24 hours such that the surface of the wax is flat and smooth, and then the wax is stored for at least 1 hour at 20°C before the hardness measurement is carried out.

20

Adhesion profile measurement protocol

The adhesion profile is measured using a texture analyser sold under the name TA-TX2i by RHEO on a sample of product which is spread out on a glass plate in the form of a film of a thickness of 300 µm.

The test consists in contacting a cylindrical elastomer probe 6 mm in diameter with the product.

The probe is applied (speed 0.1 mm = m/s) with a force of 1N to the product (for 10 s) and then withdrawn (speed = 1 mm/s). The force required to withdraw the probe is measured. The tackier the product, the greater this force will be.

This is the measurement of the adhesive power in N.s.

35 The measurement is made at T_0 (PA_{T_0}) and at

20% evaporation ($PA_{20\%}$). The adhesion profile is equal to $PA_{20\%}/PA_{T0}$.

Solids content measurement protocol

5 This consists of a measurement of the dry extract of the mascara liquor, which is carried out on a Mettler Toledo HG 53 balance (Halogen Moisture Analyzer).

10 A sample of mascara (2-3 g) is deposited on an aluminium dish and subjected to a temperature of 120°C for 60 minutes. The measurement of the dry extract corresponds to the monitoring of the mass of the sample over time. The final solids content is therefore the percentage of the final mass (after
15 60 min) in relation to the initial mass: $DE = (\text{final mass}/\text{initial mass}) \times 100$, DE corresponding to the solids content defined by a dry solids extract.

EXAMPLES

20 A number of mascara compositions were produced and characterized in accordance with the invention:

Wax/water emulsion-type formulation:

25	Fatty phase	x%
	Stearic acid	5.82%
	Neutralizing agents	2.9%
	<u>Black iron oxide</u>	<u>y%</u>
	Hydroxyethylcellulose	0.91%
30	<u>Gum arabic</u>	<u>3.45%</u>

Additives, preservatives, water qs

Data relating to these compositions are collated in the table which follows.

Test	Solids content (%)	(PA _{T0}) N.s	(PA _{20%}) N.s	PA = (PA _{20%}) / (PA _{T0})	Consistency index (Pa)	Type of fatty phase	% of fatty phase = x	% of black iron oxide = y
No. 1 according to the invention	46.6	153	125	0.8	536	Tackifying wax	28	5.45
No. 2 according to the invention	49.6	220	234	1.1	505	Tackifying wax	32	5.45
No. 3 according to the invention	52.4	197	71	0.36	953	Tackifying wax	35	5.45
No. 4 according to the invention	56.8	107	205	1.91	490	Semi-crystalline polymer + oil (described above)	35	8
Comparative Effet Faux Cils	52.7	96	279	2.9	1 280	/	/	/
Comparative Volum Express	39	67	200	2.98	2 030	/	/	/
Comparative Intencils	41.3	151	137	0.9	570	/	/	/

The mascara Volum Express is sold commercially under the Maybelline brand as a volumizing mascara.

5 The mascara Intencils is sold commercially under the Lancôme brand as a volumizing mascara.

The mascara Effet Faux Cils is sold commercially under the Yves Saint Laurent brand as a volumizing mascara.

10 The table above shows that only the compositions of the invention exhibit a high or even very high solids content in tandem with an optimum adhesion profile.

15 They make it possible, in effect, to obtain a rapid eyelash makeup which is homogeneous and exhibits a very good volumizing effect.

CLAIMS

1. Keratin fibre makeup composition having
 - a solids content defined by a dry solids
5 extract of more than 45% of the total weight of the composition; and
 - an adhesion profile ≤ 2.5 , the said adhesion profile representing the ratio of the adhesive power at T_0 (written PA_{T_0} , T_0 corresponding to the time
10 at which the composition is applied) to the adhesive power when 20% of the said composition has evaporated ($PA_{20\%}$).
2. Composition according to Claim 1, wherein the solids content is greater than 46% by
15 weight, preferably greater than 47%, more preferably greater than 48% or better still greater than 50% of the total weight of the composition.
3. Composition according to Claim 1 or 2, wherein the said adhesion profile is from 0.05 to 2.5;
20 preferably from 0.1 to 2.2; more preferably from 0.2 to 2; better still from 0.3 to 1.8, even better still from 0.5 to 1.8 and preferentially from 1 to 1.8.
4. Composition according to any one of Claims 1 to 3, comprising at least one fatty phase
25 comprising at least one structuring agent.
5. Composition according to Claim 4, wherein the structuring agent is selected from tackifying waxes, the combinations of a specific
30 compound with at least one oil, and mixtures thereof.
6. Composition according to Claim 5, wherein the tackifying waxes have the following features:
 - a tack ≥ 0.7 N.s, in particular ranging
35 from 0.7 to 30 N.s.; preferably ≥ 1 N.s, in particular

ranging from 1 to 20 N.s; better still ≥ 2 N.s., in particular ranging from 2 to 10 N.s;

- a hardness ≤ 3.5 MPa, preferably ranging from 0.01 to 3.5 MPa, more preferably still from 0.05 to 3 MPa, and even better still from 0.1 to 2.5 MPa.

7. Composition according to Claim 5, wherein the said structuring agent consists of the combination of a specific compound with at least one oil.

8. Composition according to Claim 7, wherein the specific compound is selected from semi-crystalline polymers; fatty-phase rheological agents such as polyamide-type polymers and hydrophobic silicas; and mixtures thereof.

9. Composition according to Claim 7 or 8, wherein the oil is selected from volatile and non-volatile hydrocarbon oils, silicone oils and/or fluoro oils, and mixtures thereof.

10. Composition according to any one of Claims 7 to 9, wherein the oil has a molecular mass greater than or equal to 250 g/mol, in particular from 250 to 10 000 g/mol, preferably greater than or equal to 300 g/mol, in particular from 300 to 8000 g/mol, and better still greater than or equal to 400 g/mol, in particular from 400 to 5000 g/mol.

11. Composition according to any one of Claims 7 to 10, wherein the combination of a specific compound with at least one oil has:

- a tack ≥ 0.1 N.s, in particular ranging from 0.1 to 30 N.s.; preferably ≥ 0.5 N.s, in particular ranging from 0.5 to 20 N.s; better still ≥ 0.8 N.s., in particular ranging from 0.8 to 10 N.s, and even better still ≥ 1 , in particular between 1 and 5 N.s

- a hardness ≤ 30 MPa, in particular

ranging from 0.01 to 30 MPa, preferably from 0.05 to 25 MPa, or more preferably from 0.1 to 20 MPa.

12. Composition according to Claim 8, wherein the combination of semi-crystalline polymer with at least one oil exhibits a tack from 1 to 5 N.s and a hardness of from 0.1 to 20 MPa.

13. Composition according to any one of Claims 4 to 12, wherein the structuring agent represents from 10 to 60%, preferably from 15 to 50%, more preferably from 20 to 40% of the total weight of the composition.

14. Composition according to any one of the preceding claims, being a makeup composition, a makeup base, a "top-coat" composition to be applied over makeup, or a keratin fibre care or treatment composition.

15. Composition according to any one of the preceding claims, being an eyelash coating composition, in particular an eyelash makeup composition, also called mascara, a composition to be applied over an eyelash makeup, all called top-coat, or else an eyelash treatment composition, in particular for treating the eyelashes of human beings or false eyelashes.

16. Composition according to Claim 16, being a mascara.

17. Cosmetic method for treating or making up keratin fibres, which comprises applying to the said keratin fibres a composition according to any one of Claims 1 to 16.

18. Method of coating eyelashes, which comprises applying to the eyelashes a composition according to any one of Claims 1 to 16.

19. Use of a composition according to any one of Claims 1 to 16 for making up keratin fibres.

20. Use of a composition according to any

one of Claims 1 to 16 for obtaining an easy and homogeneous application and a makeup which exhibits an excellent volumizing effect and which permits a rapid makeup for keratin fibres.